

760.401


- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Pavimento: betão ou azulejo

RALO DE PAVIMENTO COM DESCARGA VERTICAL, 250 x 250 mm




Referência	D [mm]	D1 [mm]	F [mm]	H [mm]	H1 [mm]
760.401.075	75	160	250 x 250	286	65
760.401.110	110	160	250 x 250	297	76

GRELHAS COMPATÍVEIS

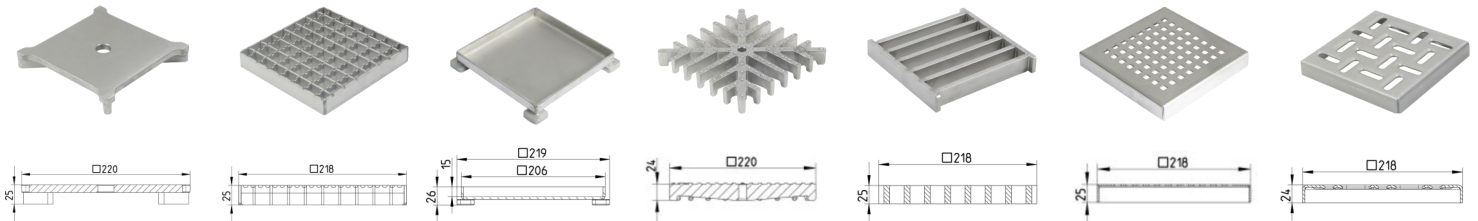


Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.218.000.10	790.218.000.22	790.218.000.06	790.218.000.60	790.218.000.28	790.218.000.04	790.218.000.03
R50 (5000 Kg.)	L15 (1250 Kg.)	L15 (1000 Kg.)	A15 (4000 Kg.)	R50 (6000 Kg.)	K3 (700 Kg.)	L15 (1500 Kg.)

SIFÃO REMOVÍVEL

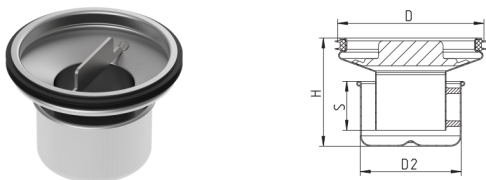

Referência	D [mm]	H [mm]	S [mm]	D2 [mm]	Caudal [l/seg]
562.002.000 S	157	115	52	107	3,3

CESTO DE RETENÇÃO DE INERTES

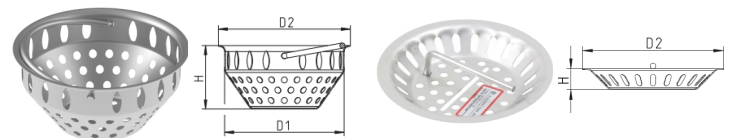

Referência	D1 [mm]	H [mm]	D2 [mm]	Volume [l]
780.002.000.05				
780.002.001.05	140	74	155	0,9
780.002.001.05	-	22	150	0,2