


761.403


- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Pavimento: betão ou azulejo
- Tipo de membrana: Membrana líquida

RALO DE PAVIMENTO COM DESCARGA VERTICAL, 300 x 300 mm




Referência	D [mm]	D1 [mm]	F [mm]	Z [mm]	H [mm]	H1 [mm]	H2 [mm]
761.403.110	110	260	300 x 300	400 x 400	371	76	20

GRELHAS COMPATÍVEIS

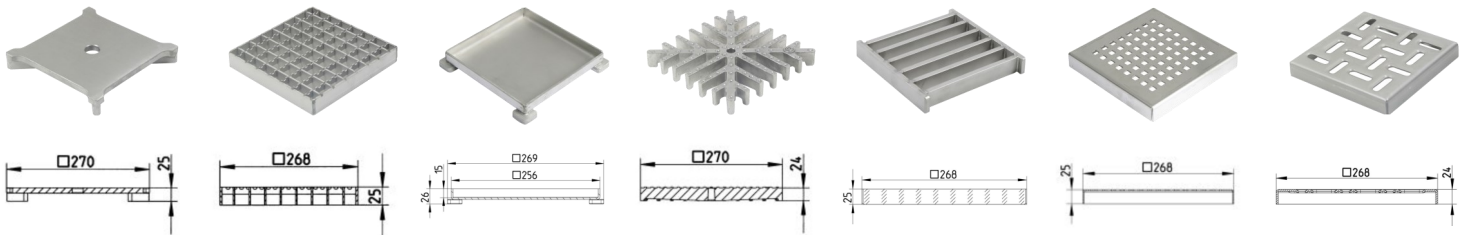


Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.268.000.10	790.268.000.22	790.268.000.06	790.268.000.60	790.268.000.28	790.268.000.04	790.268.000.03
R50 (5000 Kg.)	L15 (2000 Kg.)	L15 (1500 Kg.)	R50 (7000 Kg.)	M125 (12000 Kg.)	K3 (800 Kg.)	L15 (1750 Kg.)

SIFÃO REMOVÍVEL



Referência	D [mm]	H [mm]	S [mm]	D2 [mm]	Caudal [l/seg]
562.103.000 S	246	118	52	197	7,8

CESTO DE RETENÇÃO DE INERTES

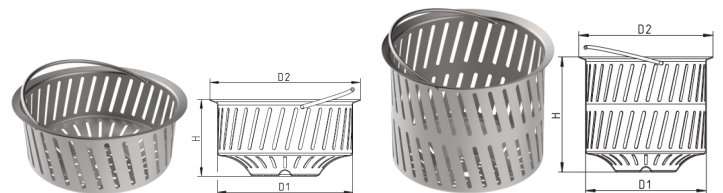

780.004.020.05

780.004.020.05

Referência	D1 [mm]	H [mm]	D2 [mm]	Volume [l]
780.004.020.05	220	125	245	3,9
780.004.030.05	220	210	245	7,1