


763.402


- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Pavimento: betão ou azulejo

RALO DE PAVIMENTO COM DESCARGA HORIZONTAL, 200 x 200 mm




Referência	D [mm]	D1 [mm]	F [mm]	H [mm]	H1 [mm]	W1 [mm]
763.402.075	75	160	200 x 200	219	186	250
763.402.110	110	160	200 x 200	219	167	153

GRELHAS COMPATÍVEIS

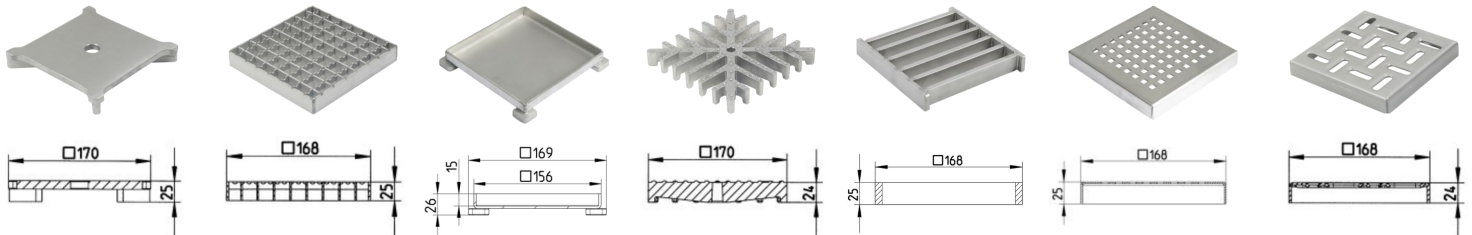


Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.168.000.10	790.168.000.22	790.168.000.06	790.168.000.60	790.168.000.28	790.168.000.04	790.168.000.03
R50 (5000 Kg.)	R50 (5000 Kg.)	L15 (1500 Kg.)	R50 (7000 Kg.)	M125 (12000 Kg.)	K3 (800 Kg.)	L15 (1750 Kg.)

SIFÃO REMOVÍVEL



Referência	D [mm]	H [mm]	S [mm]	D2 [mm]	Caudal [l/seg]
562.002.000 S	157	115	52	107	3,3

CESTO DE RETENÇÃO DE INERTES



Referência	D1 [mm]	H [mm]	D2 [mm]	Volume [l]
780.002.000.05	140	74	155	0,9