


**763.403**


- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Pavimento: betão ou azulejo

**RALO DE PAVIMENTO COM DESCARGA HORIZONTAL, 300 x 300 mm**




Referência	D [ mm ]	D1 [ mm ]	F [ mm ]	H [ mm ]	H1 [ mm ]	W1 [ mm ]
763.403.110	110	250	300 x 300	270	218	201

**GRELHAS COMPATÍVEIS**

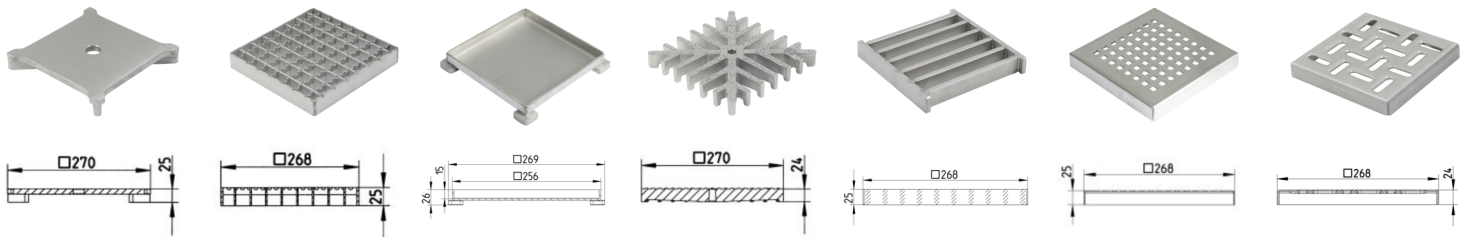


Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.268.000.10	790.268.000.22	790.268.000.06	790.268.000.60	790.268.000.28	790.268.000.04	790.268.000.03
R50 (5000 Kg.)	L15 (2000 Kg.)	L15 (1500 Kg.)	R50 (7000 Kg.)	M125 (12000 Kg.)	K3 (800 Kg.)	L15 (1750 Kg.)

**SIFÃO REMOVÍVEL**



Referência	D [ mm ]	H [ mm ]	S [ mm ]	D2 [ mm ]	Caudal [ l/seg ]
562.103.000 S	246	118	52	197	7,8

**CESTO DE RETENÇÃO DE INERTES**

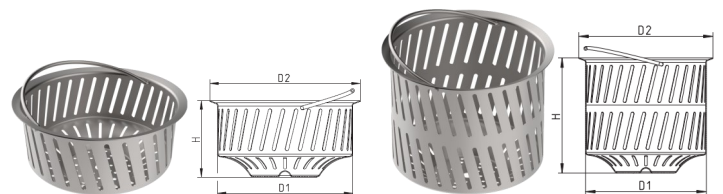

780.004.020.05

780.004.020.05

Referência	D1 [ mm ]	H [ mm ]	D2 [ mm ]	Volume [ l ]
780.004.020.05	220	125	245	3,9
780.004.030.05	220	210	245	7,1