


766.403


- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Pavimento: betão ou azulejo

RALO DE PAVIMENTO COM DESCARGA VERTICAL, 300 x 300 mm




Referência	D [mm]	D1 [mm]	F [mm]	H [mm]	H1 [mm]
766.403.075	75	250	300 x 300	280	65
766.403.110	110	250	300 x 300	289	76
766.403.160	160	250	300 x 300	307	95

GRELHAS COMPATÍVEIS

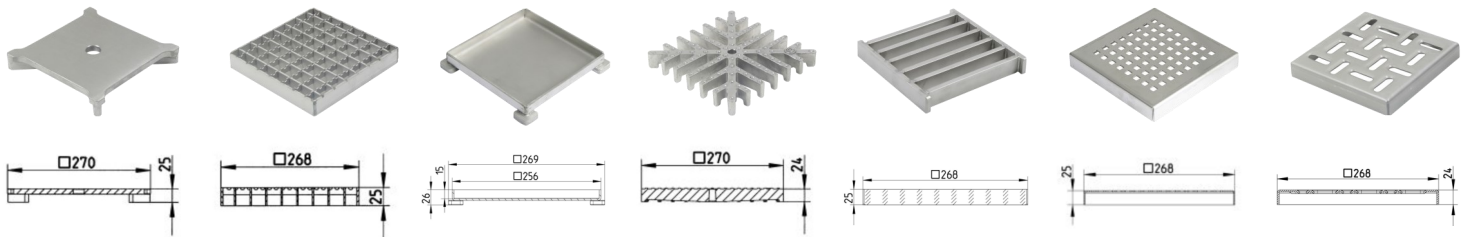



Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.268.000.10	790.268.000.22	790.268.000.06	790.268.000.60	790.268.000.28	790.268.000.04	790.268.000.03
R50 (5000 Kg.)	L15 (2000 Kg.)	L15 (1500 Kg.)	R50 (7000 Kg.)	M125 (12000 Kg.)	K3 (800 Kg.)	L15 (1750 Kg.)

SIFÃO REMOVÍVEL



Referência	D [mm]	H [mm]	S [mm]	D2 [mm]	Caudal [l/seg]
562.103.000 S	246	118	52	197	7,8

CESTO DE RETENÇÃO DE INERTES



780.004.020.05

780.004.010.05

Referência	D1 [mm]	H [mm]	D2 [mm]	Volume [l]
780.004.020.05	220	125	245	3,9
780.004.010.05	-	41	245	0,8