


## TYPE 110.000


- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Pavimento: betão ou azulejo

## CORPO DE RALO COM DESCARGA HORIZONTAL




Referência	D [ mm ]	D1 [ mm ]	H [ mm ]	H1 [ mm ]	W1 [ mm ]	D2 [ mm ]
110.000.050	50	Ø140	103	70	128	113
110.000.075	75	Ø140	103	58	133	113
110.000.110	110	Ø140	124	71	143	113

## SECÇÃO SUPERIOR 200 X 200 mm



Referência	D [ mm ]	F [ mm ]	H [ mm ]	H5 [ mm ]
710.402.000	110	200 x 200	100	51


## GRELHAS COMPATÍVEIS

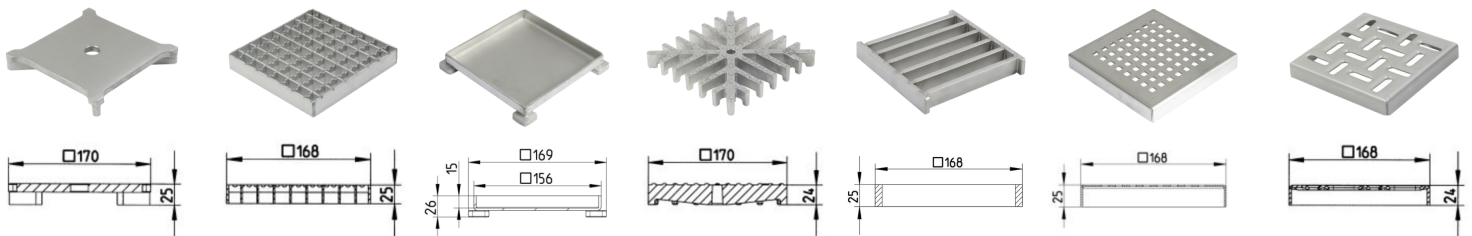

Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.168.000.10	790.168.000.22	790.168.000.06	790.168.000.60	790.168.000.28	790.168.000.04	790.168.000.03
R50 (5000 Kg.)	R50 (5000 Kg.)	L15 (1500 Kg.)	R50 (7000 Kg.)	M125 (12000 Kg.)	K3 (800 Kg.)	L15 (1750 Kg.)


## TYPE 110.000

### SIFÃO REMOVÍVEL



Referência	D [ mm ]	H [ mm ]	S [ mm ]	D2 [ mm ]	Caudal Máximo [ l/seg ]
502.050.110	108	89	50	85	1,7

### CESTO DE RETENÇÃO DE INERTES



Referência	H5 [ mm ]	D2 [ mm ]
502.000.000 S	22	150