


TYPE 726.602


- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Pavimento: vinil

RALO DE PAVIMENTO COM DESCARGA HORIZONTAL, GRELHA Ø205




Referência	D [mm]	D1 [mm]	F [mm]	Z [mm]	H [mm]	H1 [mm]	W1 [mm]
726.602.075	75	160	Ø232	Ø275	165	132	250
726.602.110	110	160	Ø232	Ø275	165	113	153

GRELHAS COMPATIVAS

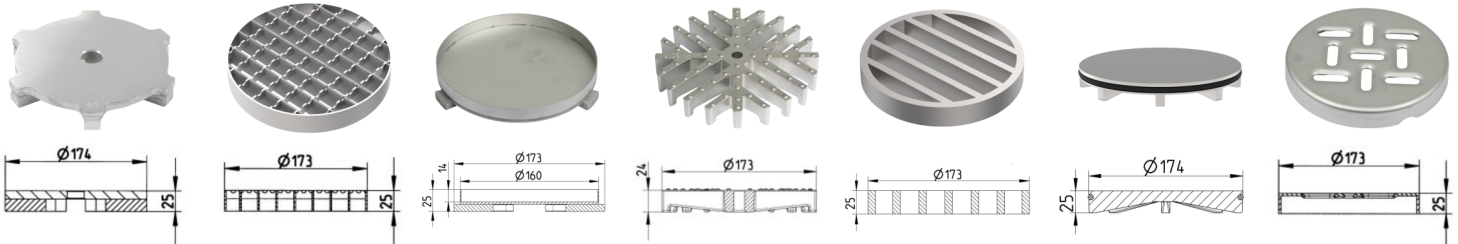


Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Estanque	3MM
790.173.000.10	790.173.000.22	790.173.000.06	790.173.000.60	790.173.000.28	790.173.000.07 S	790.173.000.03 S
M125 (10000 Kg.)	R50 (3500 Kg.)	L15 (1000 Kg.)	M125 (8333 Kg.)	N250 (16666 Kg.)	N250 (20000)	L15 (2500 Kg.)

SIFÃO REMOVÍVEL



Referência	D [mm]	H [mm]	S [mm]	D2 [mm]	Caudal [l/seg]
562.002.000 S	157	115	52	107	3,3

CESTO DE RETENÇÃO DE INERTES



Referência	H [mm]	D2 [mm]	Volume [l]
780.002.001.05	22	150	0,2