



**CORPO DERALO COM DESCARGA HORIZONTAL**



- Fabricado em aço inoxidável AISI304 ou AISI316
- Material (EN): EN 1.4301
- Flange para membrana de impermeabilização

Referência	D [ mm ]	D1 [ mm ]	Z [ mm ]	H [ mm ]	H1 [ mm ]	W1 [ mm ]
771.002.075	75	190	Ø409	218	186	250
771.002.110	110	190	Ø409	218	166	153

**SECÇÕES SUPERIORES COMPATÍVEIS**



- Fabricado em aço inoxidável AISI304/EN1.4301
- Pavimento: Betão ou azulejo

Referência	D [ mm ]	F [ mm ]	H [ mm ]
774.402.000	160	200 x 200	147
774.401.000	160	250 x 250	155




- Fabricado em aço inoxidável AISI304/EN1.4301
- Pavimento: Betão ou azulejo

Referência	D [ mm ]	F [ mm ]	Z [ mm ]	H [ mm ]	H2 [ mm ]
774.422.000	160	200 x 200	300 x 300	147	20
710.423.000	160	300 x 300	400 x 400	161	20




- Fabricado em aço inoxidável AISI304/EN1.4301
- Pavimento: Betão ou azulejo

Referência	D [ mm ]	F [ mm ]	H [ mm ]	H5 [ mm ]
710.403.000	160	300 x 300	161	70

**SECÇÕES SUPERIORES COMPATIVÉIS**



- Fabricado em aço inoxidável AISI304/EN1.4301
- Pavimento: resina

Referência	D [ mm ]	F [ mm ]	H [ mm ]	H5 [ mm ]
774.502.000	160	Ø205	147	-
710.503.000	160	Ø305	157	59




- Fabricado em aço inoxidável AISI304/EN1.4301
- Pavimento: vinil

Referência	D [ mm ]	F [ mm ]	Z [ mm ]	H [ mm ]	H5 [ mm ]
774.602.000	160	Ø232	Ø275	172	-
710.603.000	160	Ø332	Ø375	156	65




- Fabricado em aço inoxidável AISI304/EN1.4301
- Pavimento: betão ou azulejo

Referência	D [ mm ]	F [ mm ]	F1 [ mm ]	H [ mm ]
774.702.000	160	200 x 200	Ø175	147

**SIFÃO REMOVÍVEL**


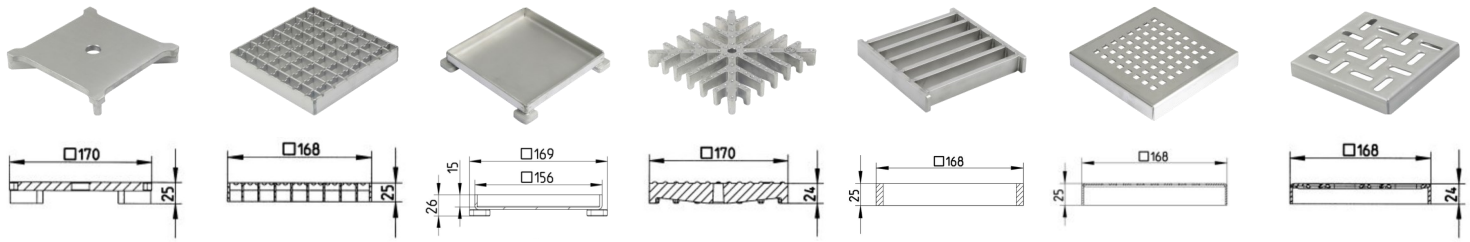
Referência	D [ mm ]	H [ mm ]	S [ mm ]	D2 [ mm ]	Caudal [ l/seg ]
562.002.000 S	157	115	52	107	3,3

**CESTO DE RETENÇÃO DE INERTES**


Referência	D1 [ mm ]	H [ mm ]	D2 [ mm ]	Volume [ l ]
780.002.000.05	140	74	155	0,9


## TYPE 771.002

### GRELHAS COMPATÍVEIS COM SECÇÃO SUPERIOR 200 x 200 mm




Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.168.000.10	790.168.000.22	790.168.000.06	790.168.000.60	790.168.000.28	790.168.000.04	790.168.000.03
R50 (5000 Kg.)	R50 (5000 Kg.)	L15 (1500 Kg.)	R50 (7000 Kg.)	M125 (12000 Kg.)	K3 (800 Kg.)	L15 (1750 Kg.)

### GRELHAS COMPATÍVEIS COM SECÇÃO SUPERIOR 250 x 250 mm

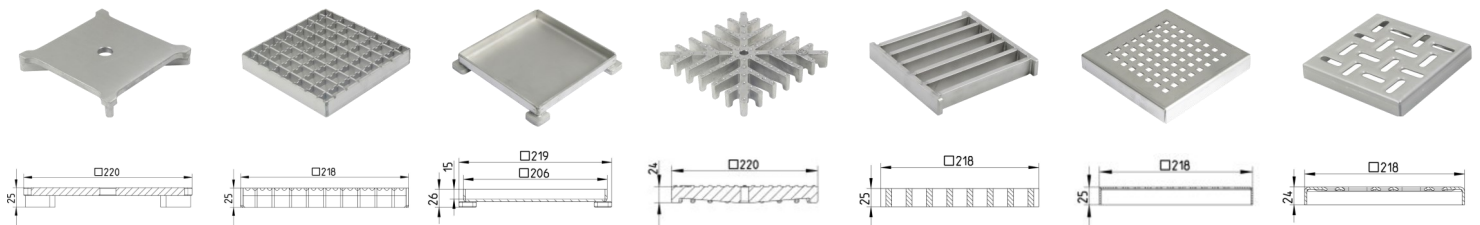


Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.218.000.10	790.218.000.22	790.218.000.06	790.218.000.60	790.218.000.28	790.218.000.04	790.218.000.03
R50 (5000 Kg.)	L15 (1250 Kg.)	L15 (1000 Kg.)	A15 (4000 Kg.)	R50 (6000 Kg.)	K3 (700 Kg.)	L15 (1500 Kg.)

### GRELHAS COMPATÍVEIS COM SECÇÃO SUPERIOR 300 x 300 mm

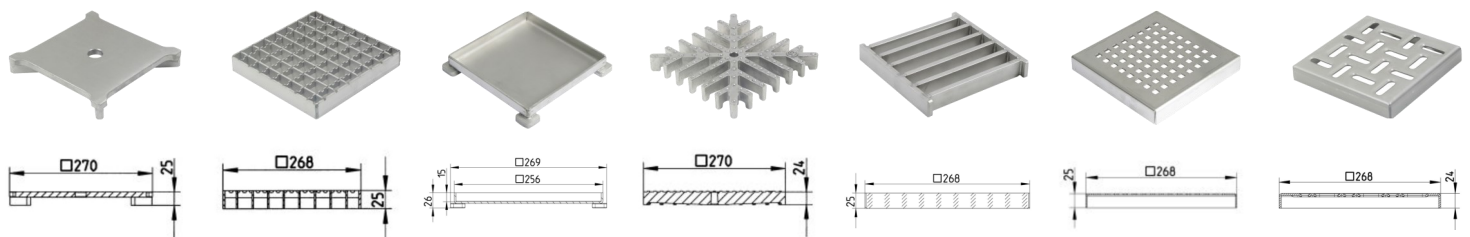


Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Duche	3MM
790.268.000.10	790.268.000.22	790.268.000.06	790.268.000.60	790.268.000.28	790.268.000.04	790.268.000.03
R50 (5000 Kg.)	L15 (2000 Kg.)	L15 (1500 Kg.)	R50 (7000 Kg.)	M125 (12000 Kg.)	K3 (800 Kg.)	L15 (1750 Kg.)

**GRELHAS COMPATÍVEIS COM SECÇÃO SUPERIOR Ø200 mm**

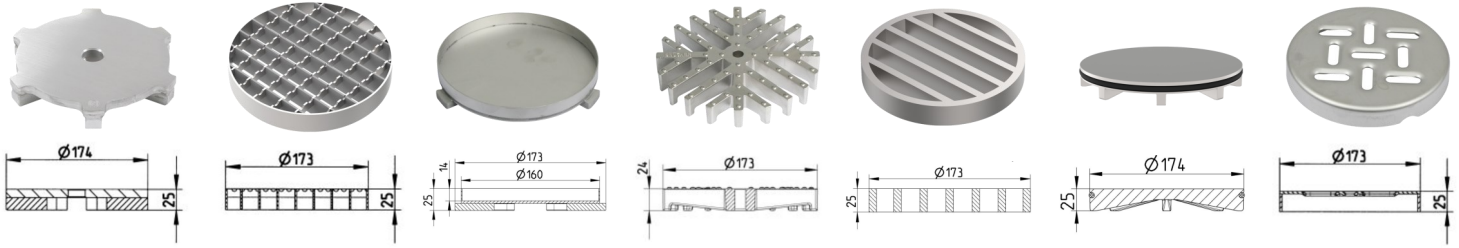

Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	Estanque	3MM
790.173.000.10	790.173.000.22	790.173.000.06	790.173.000.60	790.173.000.28	790.173.000.07 S	790.173.000.03 S
M125 (10000 Kg.)	R50 (3500 Kg.)	L15 (1000 Kg.)	M125 (8333 Kg.)	N250 (16666 Kg.)	N250 (20000)	L15 (2500 Kg.)

**GRELHAS COMPATÍVEIS COM SECÇÃO SUPERIOR Ø300 mm**

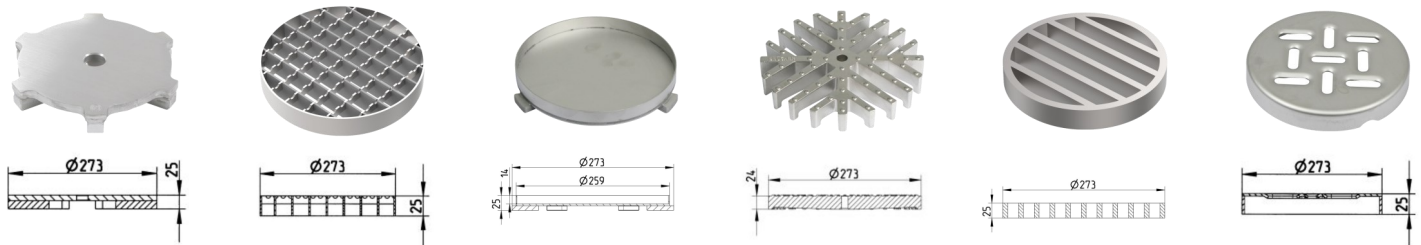

Ranhurada	Entramada	Rebaixada	Hygienic Pro	Ladder	3MM
790.273.000.10 S	790.273.000.22	790.273.000.06	790.273.000.60	790.273.000.28	790.273.000.03 S
M125 (8333 Kg.)	L15 (2000 Kg.)	K3 (750 Kg.)	R50 (5000 Kg.)	M125 (10000 Kg.)	L15 (1000 Kg.)